

6248/6248A

SOFT SERVE FREEZER

Two Flavor, Floor, Digital Controls



Powerful & Versatile

Two-flavor medium capacity floor model for ice cream, frozen yogurt and much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for any medium capacity outlets to serve soft ice cream, frozen yogurt, gelato or sorbet.
Fully loaded with all standard options.



Hopper Agitators

Maintain product consistency and prevent product separation

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6248 / 6248A

SOFT SERVE FREEZER

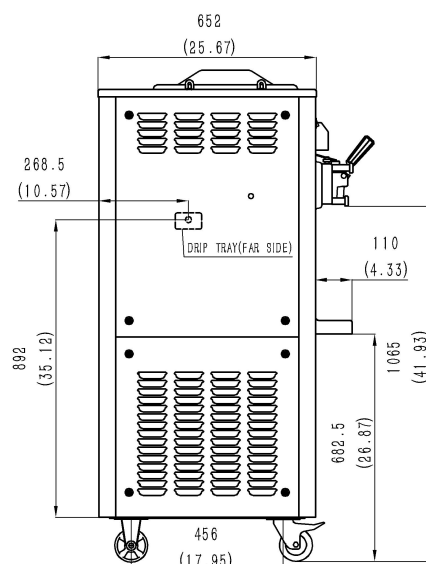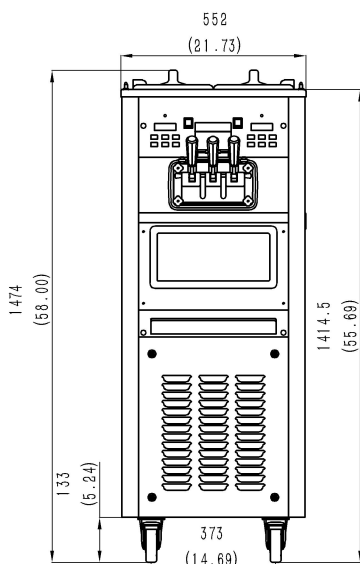

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L / 12.7qt
Output Capacity (80 grams)	480 serves/hr
Clearance Requirements	152mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
--------	-----------------	--------------

Net	200 / 444	210 / 467
Shipping	217 / 482	227 / 504

Volume	0.90 CBM / 31.78 CBF
--------	----------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
------------	-------------	------------------

Width	552 / 21.7	660 / 26.0
Depth	652 / 25.7	830 / 32.7
Height	1474 / 58.0	1640 / 64.6

Electrical	MFS	MCA	Power(kW)
------------	-----	-----	-----------

220-240/50/1	30	20	3.6
208-230/60/1	30	22	3.6

FEATURES

Control Systems	Two, Digital
Refrigerated Hoppers	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light	✓
Low Mix Indicator Alarm	✓
Low Temperature Protection	✓
Motor Amperage Protection	✓
High Pressure Protection	✓
Thermal Overload Protection	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓
Spinner	✓
Soft Start	✓
Custom Branding	✓

• Above specifications are subject to change without notice

SPACEMAN USA

224 Commerce St. Unit A1,
Broomfield, CO 80020

PHONE: +01 720-328-1020 FAX: +01 720-528-8113
Email: sales@spacemanusa.com
www.spacemanusa.com